

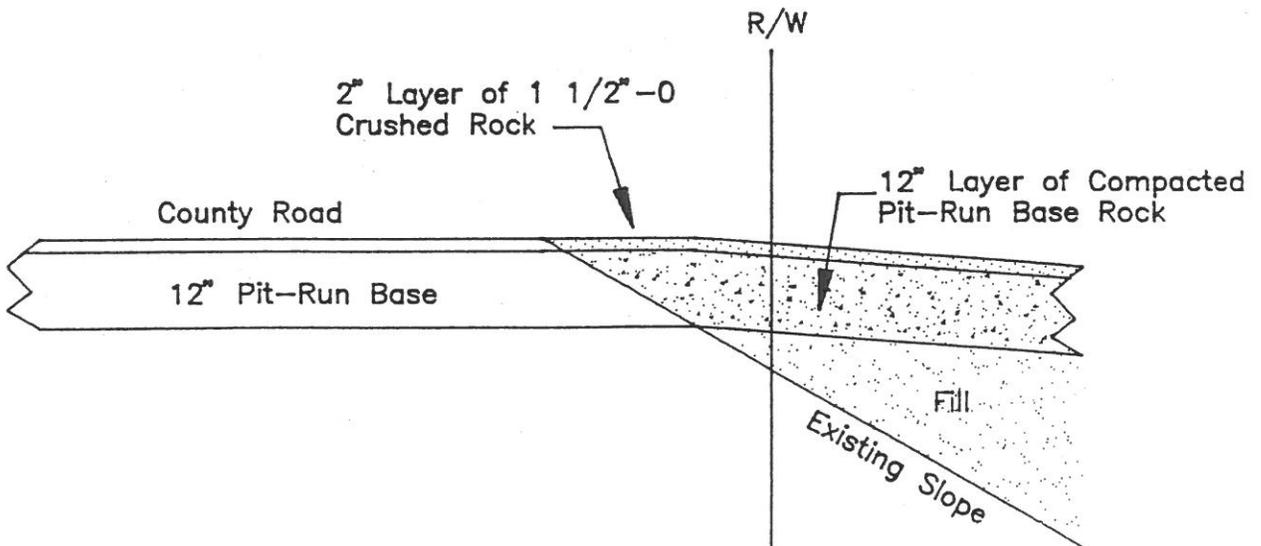


STANDARDS FOR ROAD APPROACH PERMITS

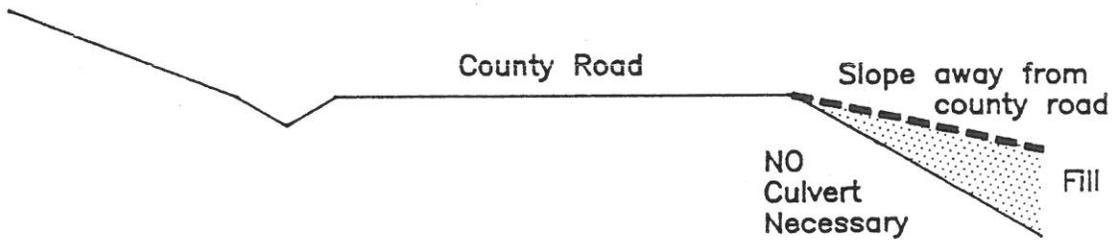

UTILITY TRENCH RESTORATION

1. In general utility cuts through existing pavement will be discouraged. It will not be permitted unless it can be shown that alternatives such as boring or jacking are not possible due to conflicts or soil conditions.
2. Backfill shall be compacted in 6-inch lifts. The top 18-inches shall be high quality crushed rock. An immediate cold mix patch shall be placed. A permanent hot mix asphalt patch shall be placed in asphalt roads within 30-days. Joints shall be sealed with AR-4000. As an alternative, controlled density fill may be used to backfill the trench.
3. Pavement overlay of 0.10 feet thickness, full width, may be required on asphalt surfaces less than 10 years old.

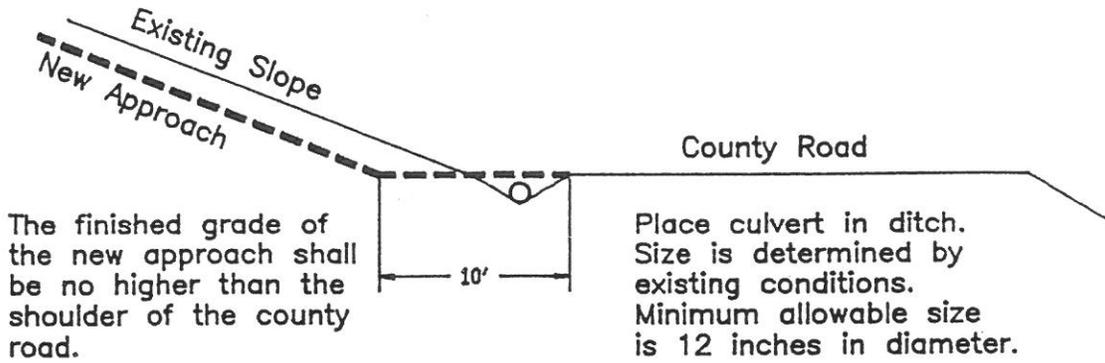